

Post-doctoral proposal at Aerodynamics and Propulsion Department (DAEP)

Aeroacoustic source localization using bayesian approaches

Contact : helene.parisot-dupuis@isae-supaeero.fr & fabien.mery@onera.fr

Location : Aerodynamics & Propulsion Department (DAEP), ISAE-SUPAERO, Toulouse, FRANCE

Duration : 12 months renewable for a maximum of 3 years

Funding : Directorate General of Armaments (DGA)

Key words : source localization, aeroacoustics, bayesian statistics, signal processing

Context :

Global economic and demographic expansion is leading to an increase in noise pollution associated with land and air transportation as well as new energy developments (wind power). Noise pollution regulations are becoming increasingly strict and the reduction of aerodynamic noise sources, known as aeroacoustics, is therefore a major challenge. The characterization of aeroacoustic sources in the pre-project phase by means of wind tunnel tests is a key step to help understand noise generation mechanisms and to be able to develop effective noise reduction strategies.

For this purpose, various source localization techniques have been developed. The most well known is called Beamforming and was developed by Billingsley and Kinns [1] in 1974. This technique is based on the assumption that the sound field radiated by the sources under study follows a certain source model (usually monopole). It is then possible to localize the acoustic sources from farfield microphone measurements by interpreting the propagation delays measured between each microphone of the antenna and by knowing the source-antenna distance. However, the use of inverse methods is required for the evaluation of the sound level of the studied sources. Different methods based on deconvolution algorithms have been developed for that purpose: CLEAN [2], DAMAS [3].

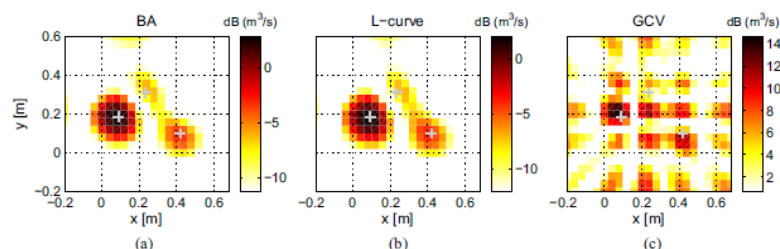


Figure 1: Reconstructed sound fields in source plane for different regularization methods: a) Bayesian, b) L-curve et c) GCV [5].

More recently, source localization techniques based on bayesian statistics have also been developed [4]. These techniques offer an original solution to the inverse problem of acoustic

source localization. Work has been done in recent years to evaluate the potential of these methods on simple test cases ([5], [6]). This approach seems particularly promising for the localization of aeroacoustic sources in wind tunnels and has already shown its potential in other fields of aeroacoustics, such as the characterization of porous materials [7] or the impedance reduction of liners under grazing flow [8].

Content :

The objective of this post-doctoral fellowship is to evaluate the potential of bayesian approaches for the localization of aeroacoustic sources. Bayesian methods allow to take into account some prior knowledge about what we are looking for, which introduces a form of regularization of the inverse problem. The idea will be to extend the methods available in the literature [9] for example to problems of correlated sources encountered on rotating objects. The methodology developed will be compared to source localization codes available in the laboratory (beamforming, CLEAN-SC, CIRA, Deep Learning [10]...) or accessible online (<http://acoular.org/>). The performances of the different algorithms will be evaluated on synthetic source fields (monopoles, dipoles...) and data of increasing complexity, for example: loudspeakers or propellers in anechoic room, measurements in aeroacoustic wind tunnels, numerical LES simulations.

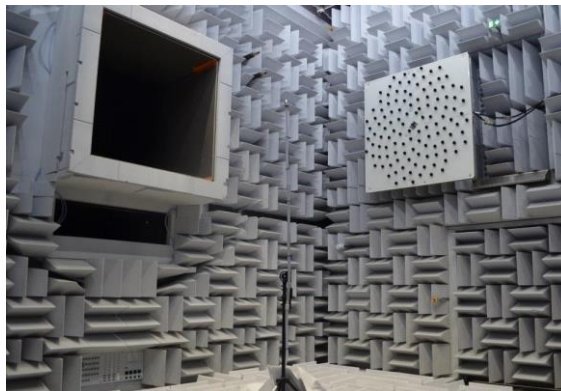


Figure 2: Localization array in ISAE-SUPAERO aeroacoustic wind tunnel.

Expected profile:

We are looking for candidates with a PhD in acoustics or applied mathematics. Knowledge in signal processing is a plus to approach this theme. Candidates will also be required to program in Matlab and/or Python.

Bibliography :

- [1] J. Billingsley and R. Kinns, « The acoustic telescope », *J. Sound Vib.* 48 (4), 485-510 (1976).
- [2] R. P. Dougherty and R. W. Stoker, « Sidelobe suppression for phased array aeroacoustic measurements », In 4th AIAA/CEAS Aeroacoustics Conference, AIAA 1998-2242 (1998).
- [3] T. F. Brooks and W. M. Humphreys Jr, « A Deconvolution Approach for the Mapping of Acoustic Sources (DAMAS) Determine from Phased Microphone Arrays », In 10th AIAA/CEAS Aeroacoustics Conference, AIAA 2006-2654 (2006).

- [4] J. Antoni, « A Bayesian approach to sound source reconstruction: Optimal basis, regularization, and focusing », *J. of the Acoustical Soc. of America*, 131, 2873-2890 (2012).
- [5] A. Pereira, J. Antoni, Q. Leclère, "Empirical bayesian regularization of the inverse acoustic problem", *Applied Acoustics* 97, 11-29 (2015).
- [6] L. Gilquin, S. Bouley, J. Antoni, T. Le Margueresse, C. Marteau, "Sensitivity analysis of two inverse methods: beamforming and bayesian focusing", *J. Sound Vib.* 455, 188-202 (2019).
- [7] R. Roncen, Z. E. A. Fella, F. Simon, E. Piot, M. Fella, E. Ogam, C. Depollier, "Bayesian inference for the ultrasonic characterization of rigid porous materials using reflected waves by the first interface", *The Journal of the Acoustical Society of America* 144 (1) (2018) 210–221. doi:10.1121/1.5044423.
- [8] R. Roncen, F. Méry, E. Piot and F. Simon, "Statistical Inference Method for Liner Impedance Eduction with a Shear Grazing Flow", *AIAA Journal* 57(3) (2019).
- [9] N. Chu, Y. Ning, L. Yu, Q. Huang and D. Wu, "A High-Resolution and Low-Frequency Acoustic Beamforming Based on Bayesian Inference and Non-Synchronous Measurements," in *IEEE Access*, vol. 8, pp. 82500-82513, 2020, doi: 10.1109/ACCESS.2020.2991606.
- [10] W. G. Pinto, M. Bauerheim and H. Parisot-Dupuis, "Deconvoluting acoustic beamforming maps with a deep neural network". *Inter-noise 2021*, Virtual event, France.